


# RC840T Series

Electromechanical Relays

**Compatible with 2- and 3-wire thermostats, this all-in-one relay includes a built-in 24 V transformer**

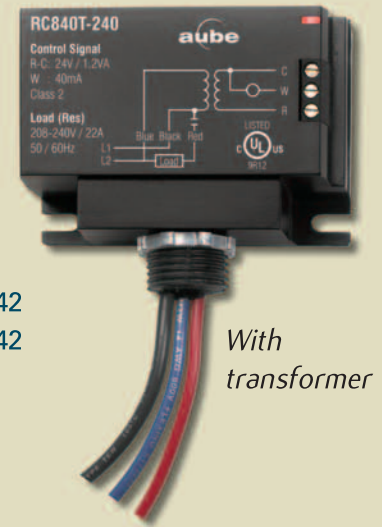

*With transformer*

**MODELS & RATINGS**

<b>RC840T-240</b>	4575 W @ 208 V	22 A resistive	1.0 HP inductive	FLA 13 / LRA 42
	5280 W @ 240 V	22 A resistive	1.5 HP inductive	FLA 12 / LRA 42
<b>RC840T-347</b>	6245 W @ 347 V	18 A resistive		

All above models operate on 50/60 Hz

**SPECIFICATIONS**

**CONTROL SIGNAL**  
24 VAC / 40 mA

**TRANSFORMER RATINGS**  
24 VAC / 1.2 VA / Class 2

**HUMIDITY LIMITS**  
0% to 95% non-condensing

**TERMINAL WIRE SIZE**  
12 AWG

**DIMENSIONS (H•W•D)**  
68 x 82 x 36 mm / 2.7 x 3.2 x 1.4 inches

**FEATURES**

**Direct replacement** for any brand name relay

**Built-in 24 V transformer** for easy installation

**Compatible with 24 V thermostats** with 2-wire connections (R, W) or 3-wire connections (R, W, C)


**Immediate relay activation** provides increased temperature control and comfort

**Epoxy-soundproofed relay** ensures quiet operation

**Terminal board connection** enables easy installation

**Low current consumption** means multiple relays can be controlled by a single thermostat

**INSTALLATION**

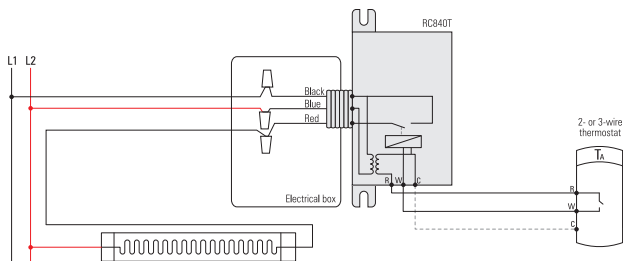

**3** year warranty

**COMPATIBLE WITH AUBE THERMOSTATS:**

- TH114-A-024T
- TH115-A-024T
- TH135-01
- TH140-28-01
- TH150 Series