

SUB Series Outdoor Enclosures

SPECIFICATION DATA



When ordering, add suffix "R" to the end of the standard meter model number.

Example: 208200-R KIT

FEATURES

- Outdoor meter enclosures may contain Honeywell Class 100, 200, 500 and Green meters (Not available in 1 PH, 277V Configurations.)
- NEMA 4X rated outdoor enclosure made of hot compression molded fiberglass reinforced polyester.
- 1-1/16" KO (3/4" cond.) on bottom of enclosure.
- Padlocking hasp.
- Available Configurations:
 - 3-Phase, 4-Wire
 - 3-Phase, 3-Wire
 - 2-Phase, 3-Wire
- Temperature Range: -40 to +250 °F (-40 to +120 °C)
- Flammability Rating: UL94-5V
- Self Extinguishing: Non-flame propogating

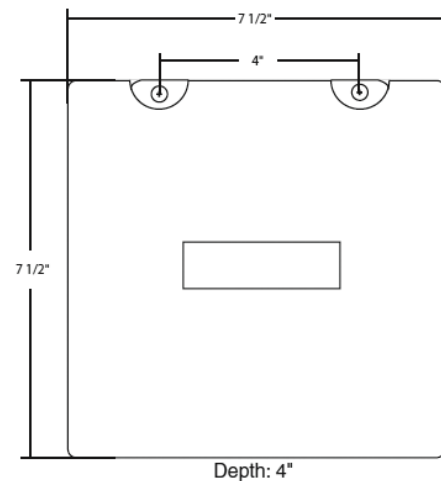


Fig. 1. Enclosure dimensions (front view).

Automation and Control Solutions

Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422

Honeywell Limited-Honeywell Limitée
35 Dynamic Drive
Toronto, Ontario M1V 4Z9
www.honeywell.com/buildingsolutions

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

