

# AM-1 Series™



## LEAD FREE THERMOSTATIC MIXING VALVES

### SUBMITTAL SHEET

Job Name	
Engineer	
Mechanical Contractor	
Contractor's P.O. No.	
Representative	
Notes	

Model(s)				
	Qty.		Notes	
	Qty.		Notes	
Approval				
Service				
Tag No.				

### APPLICATION

The Honeywell AM-1 series accurately adjusts, maintains, and limits the hot water temperature to a desired setting selected by the user. By installing a Honeywell AM-1 mixing valve, raising water heater storage temperature setting, and limiting mixed outlet water temperature to a safe temperature, more usable hot water is available.

### SPECIFICATIONS

**Design:** Straight-Through (hot and cold at the same level)

**Maximum Pressure:** 150 psi (1034 kPa)

**Certifications:** ASSE, CSA and IAPMO listed

**Patent Information:** U.S. Patent No. 6,079,625

**Warranty:** 1 year limited warranty

### MATERIALS

**Body:** Teflon®-Coated, Nickel-Plated Low Lead Brass\*

**Temperature Gauge Adapter/Thermowell:** Low Lead Brass


**Shuttle:** Teflon-Coated Low Lead Brass\*

**O-Rings:** EPDM Rubber

Teflon® is a registered trademark of DuPont or its affiliates.

**\*Lead Free Plumbing Code Compliance:** The wettable surfaces of lead free models contain less than 0.25% of lead by weighted average.

### DIMENSIONS

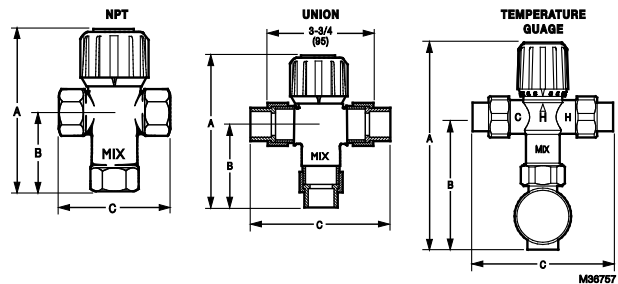

Model Number	Pipe Size	Operating Temp.	CV	ASSE Certs.	Dimensions		
	Inch				A	B	C
<b>NPT</b>							
AM100-1LF	1/2"	70°F - 145°F	3.2	1017	5.8	2.7	3
AM101-1LF	3/4"	70°F - 145°F	3.8	1017	5.8	2.7	3
AM102-1LF	1"	70°F - 145°F	4.3	1017	5.8	2.7	3
AM100C-1LF	1/2"	70°F - 120°F	3.2	1017	5.8	2.7	3
AM101C-1LF	3/4"	70°F - 120°F	3.8	1017	5.8	2.7	3
AM102C-1LF	1"	70°F - 120°F	4.3	1017	5.8	2.7	3
<b>Union Sweat</b>							
AM100-US-1LF	1/2"	70°F - 145°F	3.9	1017	5.4	2.8	4.6
AM101-US-1LF	3/4"	70°F - 145°F	3.9	1017	5.6	2.9	4.9
AM102-US-1LF	1"	70°F - 145°F	3.9	1017	6.3	3.7	6.5
AM100C-US-1LF	1/2"	70°F - 120°F	3.9	1017	5.4	2.8	4.6
AM101C-US-1LF	3/4"	70°F - 120°F	3.9	1017	5.6	2.9	4.9
AM102C-US-1LF	1"	70°F - 120°F	3.9	1017	6.3	3.7	6.5
AM100C1070-US-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	5.4	2.8	4.6
AM101C1070-US-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	5.6	2.9	4.9
AM102C1070-US-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.3	3.7	6.5



Model Number	Pipe Size	Operating Temp.	CV	ASSE Certs.	Dimensions		
	Inch				A	B	C
<b>Union CPVC</b>							
AM100-UCPVC-1LF	1/2"	70°F - 145°F	3.9	1017	5.8	2.8	4.7
AM101-UCPVC-1LF	3/4"	70°F - 145°F	3.9	1017	5.8	2.8	4.7
AM100C-UCPVC-1LF	1/2"	70°F - 120°F	3.9	1017	5.8	2.8	4.7
AM101C-UCPVC-1LF	3/4"	70°F - 120°F	3.9	1017	5.8	2.8	4.7
AM100C1070UCPVC1	1/2"	70°F - 120°F	1.8	1017, 1070	5.8	2.8	4.7
AM101C1070UCPVC1	3/4"	70°F - 120°F	1.8	1017, 1070	5.8	2.8	4.7
<b>Union Threaded</b>							
AM100-UT-1LF	1/2"	70°F - 145°F	3.9	1017	5.9	2.9	4.9
AM101-UT-1LF	3/4"	70°F - 145°F	3.9	1017	6.6	3.8	6.5
AM102-UT-1LF	1"	70°F - 145°F	3.9	1017	6.8	3.9	7
AM100C-UT-1LF	1/2"	70°F - 120°F	3.9	1017	5.9	2.9	4.9
AM101C-UT-1LF	3/4"	70°F - 120°F	3.9	1017	6.6	3.8	6.5
AM102C-UT-1LF	1"	70°F - 120°F	3.9	1017	6.8	3.9	7
AM100C1070-UT-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	5.9	2.9	4.9
AM101C1070-UT-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.6	3.8	6.5
AM102C1070-UT-1LF	1"	70°F - 120°F	1.8	1017, 1070	6.8	3.9	7
<b>Temperature Gauge</b>							
AM100-USTG-1LF/U	1/2"	70°F - 145°F	3.9	1017	7.1	4.5	4.6
AM101-USTG-1LF/U	3/4"	70°F - 145°F	3.9	1017	7.3	4.7	4.9
AM102-USTG-1LF/U	1"	70°F - 145°F	3.9	1017	7.4	4.8	6.5
AM100C-USTG-1LF/U	1/2"	70°F - 120°F	3.9	1017	7.1	4.5	4.6
AM101C-USTG-1LF/U	3/4"	70°F - 120°F	3.9	1017	7.3	4.7	4.9
AM102C-USTG-1LF/U	1"	70°F - 120°F	3.9	1017	7.4	4.8	6.5
AM100C1070-USTG-LF	1/2"	70°F - 120°F	1.8	1017, 1070	7.1	4.5	4.6
AM101C1070-USTG-LF	3/4"	70°F - 120°F	1.8	1017, 1070	7.3	4.7	4.9
AM102C1070-USTG-LF	1"	70°F - 120°F	1.8	1017, 1070	7.4	4.8	6.5
AM100R-USTG-1/U	1/2"	70°F - 180°F	3.9	N/A	7.1	4.5	4.6
AM101R-USTG-1/U	3/4"	70°F - 180°F	3.9	N/A	7.3	4.7	4.9
AM102R-USTG-1/U	1"	70°F - 180°F	3.9	N/A	7.4	4.8	6.5

Model Number	Pipe Size	Operating Temp.	CV	ASSE Certs.	Dimensions		
	Inch				A	B	C
<b>Union PEX</b>							
AM100-UPEX-1LF	1/2"	70°F - 145°F	3.9	1017	6.0	3.0	5.1
AM101-UPEX-1LF	3/4"	70°F - 145°F	3.9	1017	6.0	3.0	5.1
AM100C-UPEX-1LF	1/2"	70°F - 120°F	3.9	1017	6.0	3.0	5.1
AM101C-UPEX-1LF	3/4"	70°F - 120°F	3.9	1017	6.0	3.0	5.1
AM100C1070-UPEX1LF	1/2"	70°F - 120°F	1.8	1017, 1070	6.0	3.0	5.1
AM101C1070-UPEX1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.0	3.0	5.1
<b>Union Press Fittings</b>							
AM100-UP-1LF/U	1/2"	70°F - 145°F	3.9	1017	5.9	3.3	5.6
AM101-UP-1LF/U	3/4"	70°F - 145°F	3.9	1017	6.2	3.6	6.3
AM102-UP-1LF/U	1"	70°F - 145°F	3.9	1017	6.5	3.8	6.7
AM100C-UP-1LF/U	1/2"	70°F - 120°F	3.9	1017	5.9	3.3	5.6
AM101C-UP-1LF/U	3/4"	70°F - 120°F	3.9	1017	6.2	3.6	6.3
AM102C-UP-1LF/U	1"	70°F - 120°F	3.9	1017	6.5	3.8	6.7
AM100C1070-UP-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	5.9	3.3	5.6
AM101C1070-UP-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.2	3.6	6.3
AM102C1070-UP-1LF	1"	70°F - 120°F	1.8	1017, 1070	6.5	3.8	6.7
AM100R-UP-1/U	1/2"	70°F - 180°F	3.9	N/A	5.9	3.3	5.6
AM101R-UP-1/U	3/4"	70°F - 180°F	3.9	N/A	6.2	3.6	6.3
AM102R-UP-1/U	1"	70°F - 180°F	3.9	N/A	6.5	3.8	6.7
<b>Push Connect</b>							
AM100-SB-1LF/U	1/2"	70°F - 145°F	3.9	1017	6.9	4.2	7.5
AM100C1070-SB-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	6.9	4.2	7.5
AM101-SB-1LF/U	3/4"	70°F - 145°F	3.9	1017	8.1	5.5	10.0
AM101C1070-SB-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	8.1	5.5	10.0
AM102-SB-1LF/U	1"	70°F - 145°F	3.9	1017	8.2	5.5	10.1
AM102C1070-SB-1LF	1"	70°F - 120°F	1.8	1017, 1070	8.2	5.5	10.1

## Home and Building Technologies

In the U.S.:  
Honeywell  
715 Peachtree Street NE  
Atlanta, GA 30308  
customer.honeywell.com

© U.S. Registered Trademark  
© 2018 Honeywell International Inc.  
68-3103-05 M.S. Rev. 07-18  
Printed in United States

# Honeywell